

# Lecture 8

## (Wave Pulses and Fourier Transforms)

Physics 262-01 Spring 2019

Douglas Fields

# Wave Pulses

- So, if our solution to the wave equation is:

$$y(x, t) = A \cos(kx - \omega t)$$

- How do we get a wave pulse???

$$y_1(x, t) = \sin(kx - \omega t)$$

$$y_2(x, t) = \sin((k + dk)x - (\omega + d\omega)t)$$

- Using  $\sin A + \sin B = 2 \cos[(A-B)/2] \sin[(A+B)/2]$


$$y(x, t) = 2 \cos\left(\frac{dk}{2}x - \frac{d\omega}{2}t\right) \sin\left(\frac{2k + dk}{2}x - \frac{2\omega + d\omega}{2}t\right)$$

$$= 2 \cos\left(\frac{dk}{2}x - \frac{d\omega}{2}t\right) \sin(kx - \omega t)$$


Since  $dk \ll k$  and  $d\omega \ll \omega$

# Wave Pulses (Beats)

- $$y(x, t) = 2 \cos\left(\frac{dk}{2}x - \frac{d\omega}{2}t\right) \sin(kx - \omega t)$$

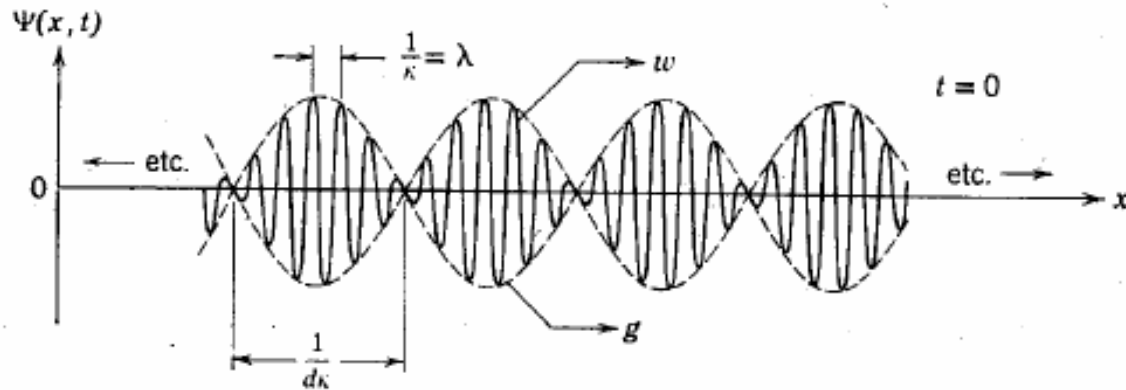

# Wave Pulses

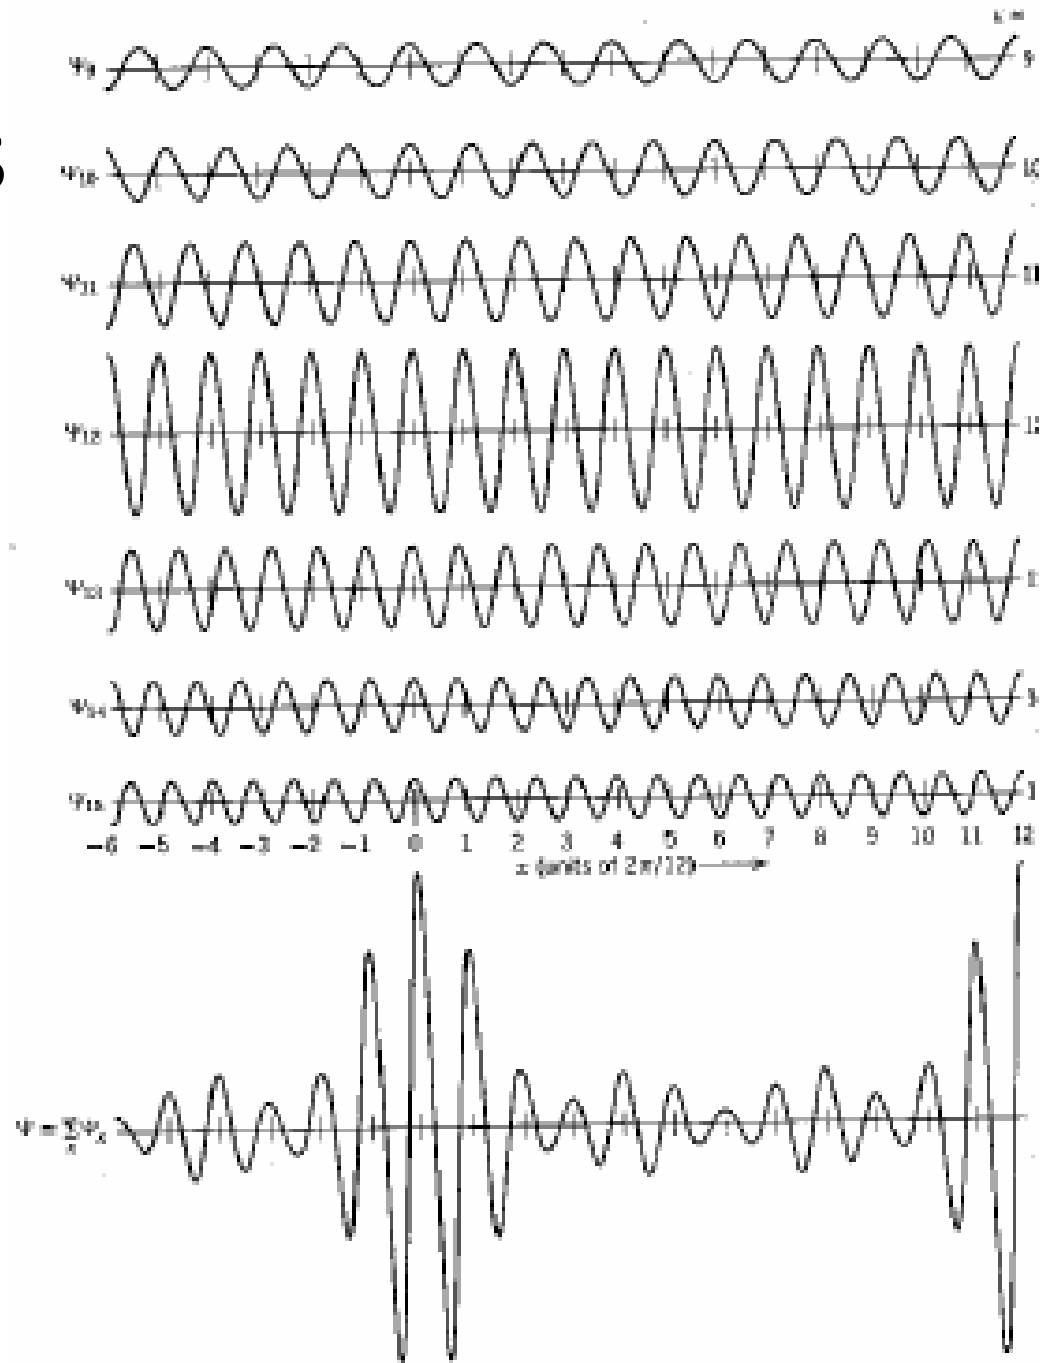

# Bounded Problem

- For a bounded problem, there are discrete (quantized) normal modes. Let's say we have some mix of those normal modes:

$$\psi(x, t) = a_1\psi_1(x, t) + a_2\psi_2(x, t) + a_3\psi_3(x, t) + \dots$$

- How do we find the values  $a_1, a_2, \dots$ ?

# Bounded Problem

- Let's multiply both sides by one of the normal mode wave functions:

$$\psi(x,t)\psi_n(x,t) = a_1\psi_1(x,t)\psi_n(x,t) + a_2\psi_2(x,t)\psi_n(x,t) + a_3\psi_3(x,t)\psi_n(x,t) + \dots$$

- Now, let's integrate over all space (or time) on both sides of the equation:

$$\int_{B1}^{B2} \psi(x,t)\psi_n(x,t) dx = \int_{B1}^{B2} a_1\psi_1(x,t)\psi_n(x,t) dx + \int_{B1}^{B2} a_2\psi_2(x,t)\psi_n(x,t) dx + \dots$$

- But the integrals on the right are either 0 (if  $n$  not equal to the index), or 1 (if it is). So,

$$a_n = \int_{-\infty}^{\infty} \psi(x,t)\psi_n(x,t) dx$$



# Wave Pulses

In the case of an **unbounded** problem, with continuous values of wave numbers:

$$\Psi(x, t) = \int_{-\infty}^{\infty} \varphi(k) \sin(kx - \omega t) dk$$

$$\varphi(k) = \int_{-\infty}^{\infty} \Psi(x, t) \sin(kx - \omega t) dx$$

k and x are conjugate variables

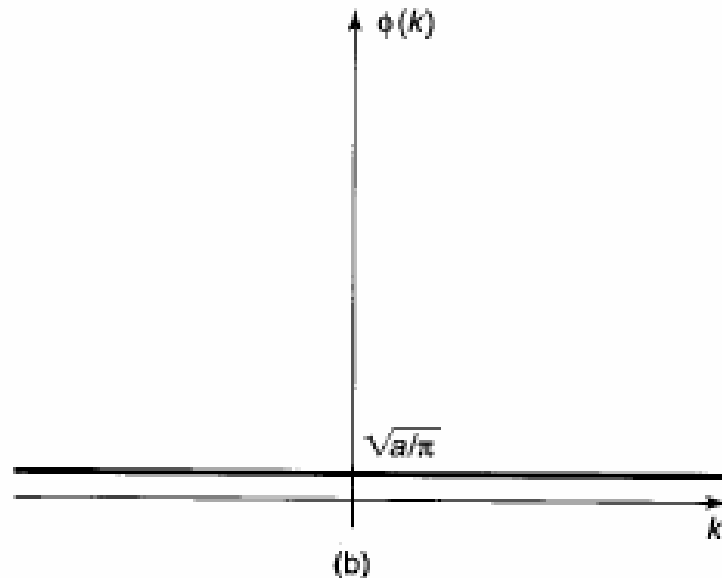
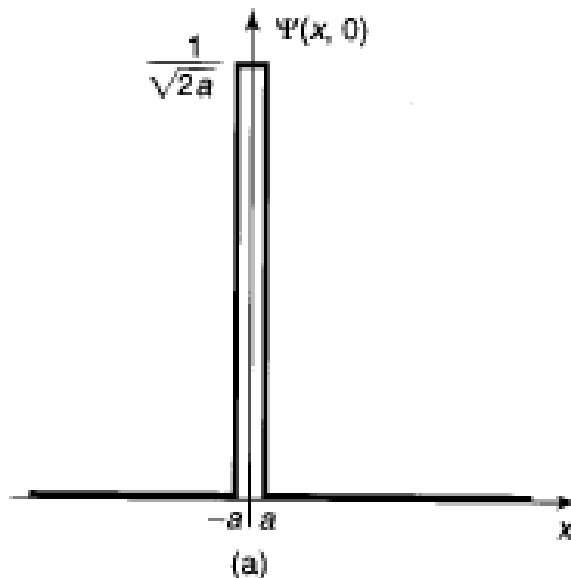


# Wave Pulses

$\omega$  and  $t$  are conjugate variables


$$\Psi(x, t) = \int_{-\infty}^{\infty} \varphi(\omega) \sin(kx - \omega t) d\omega$$

$$\varphi(\omega) = \int_{-\infty}^{\infty} \Psi(x, t) \sin(kx - \omega t) dt$$

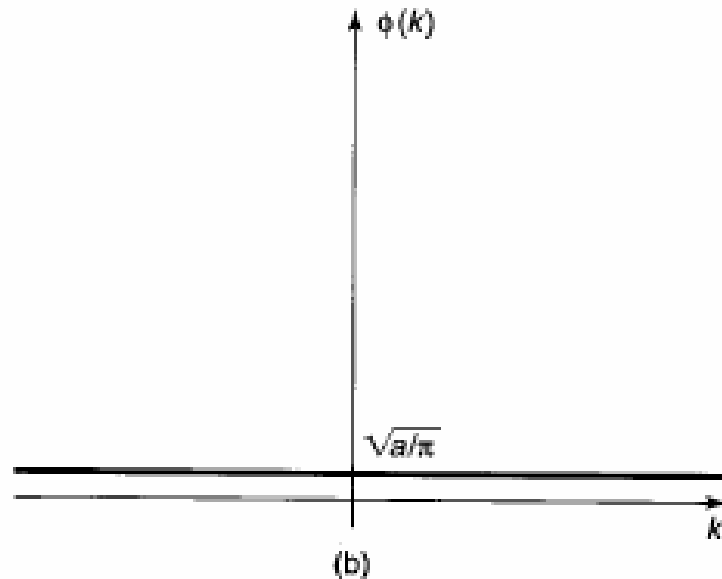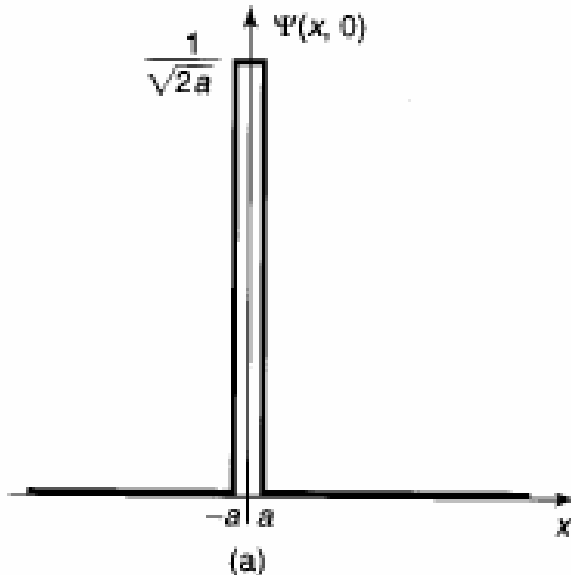




# Phasors

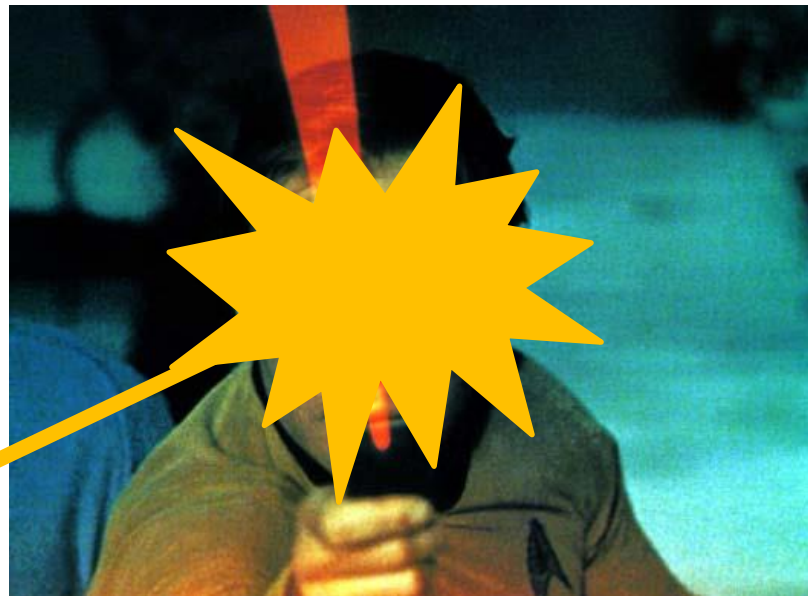



# Phasors

- One can represent  $\sin(\omega t)$  or  $\cos(\omega t)$  as a x- or y- projection of a phasor which rotates at an angular velocity  $\omega$ .

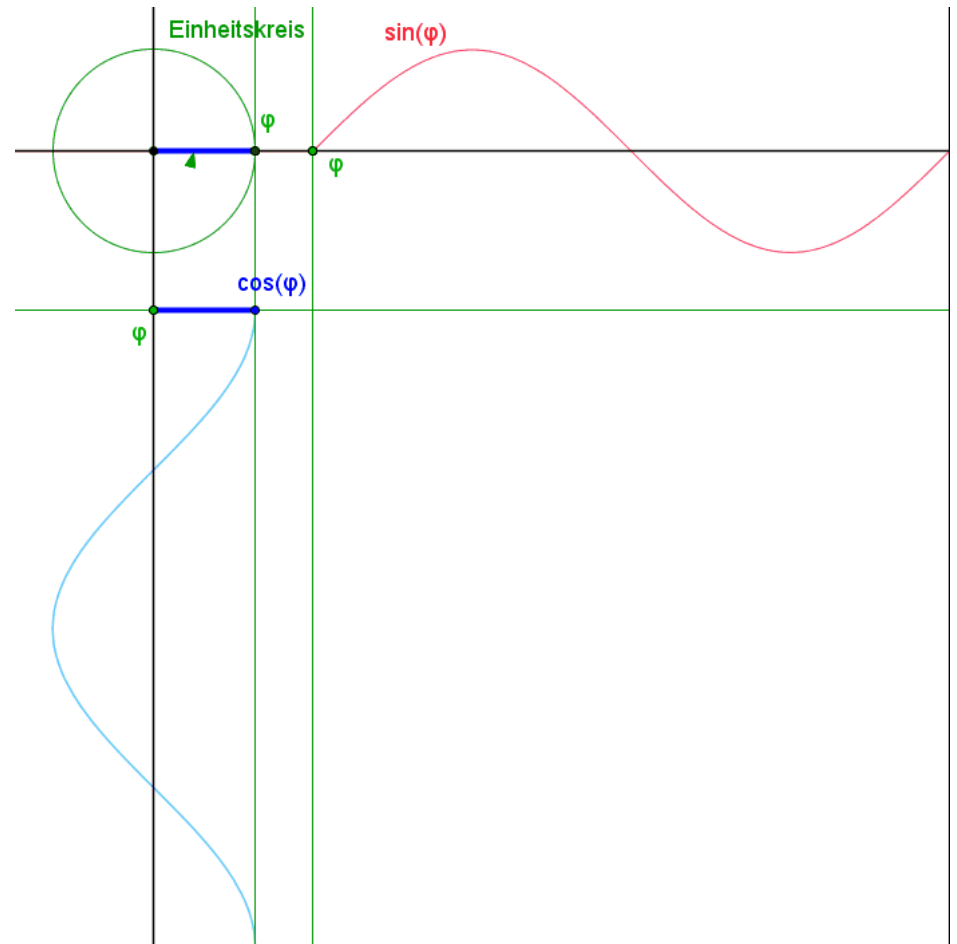


# Phasors

- Let's just focus on  $\cos(\omega t)$ .
- The phasor is rotating with angular velocity  $\omega$ , so the angle w.r.t. the x-axis is just  $\omega t$ .
- Then, the x-component of the phasor is just  $\cos(\omega t)$ .
- Or, the y-component of the phasor is just  $\sin(\omega t)$ .
- Why is this useful?

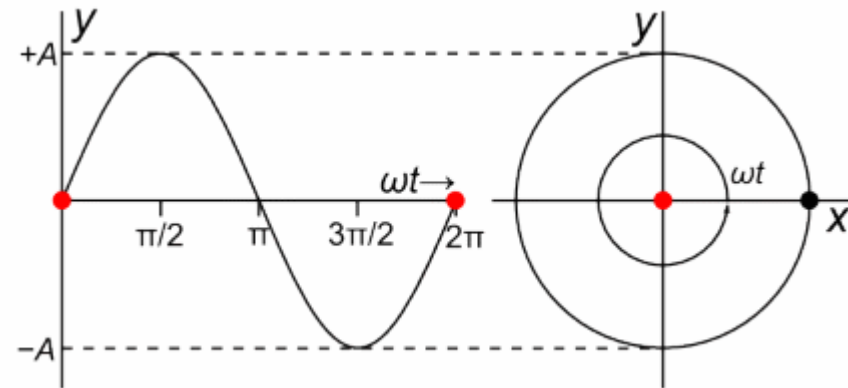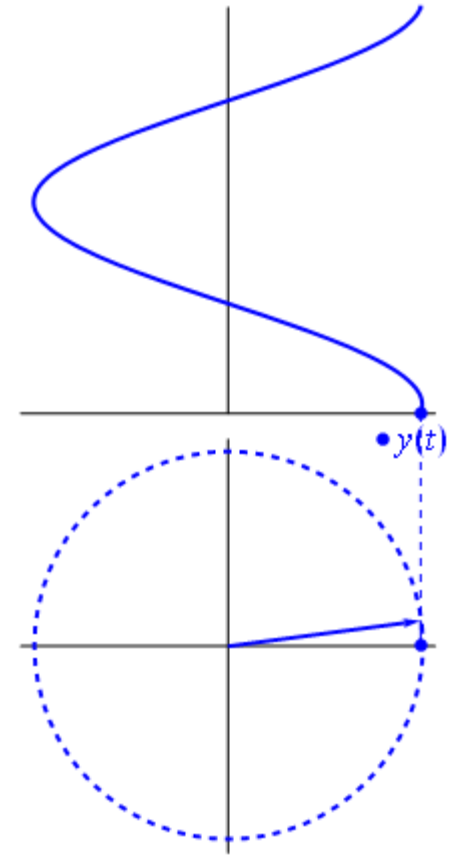


# Phasors

- Let's add two waves, in this case, two waves with the same frequency, but with different relative phases.
- Note that each wave can be represented by a phasor, and that the sum of the waves are represented by the vector sum of the phasors!



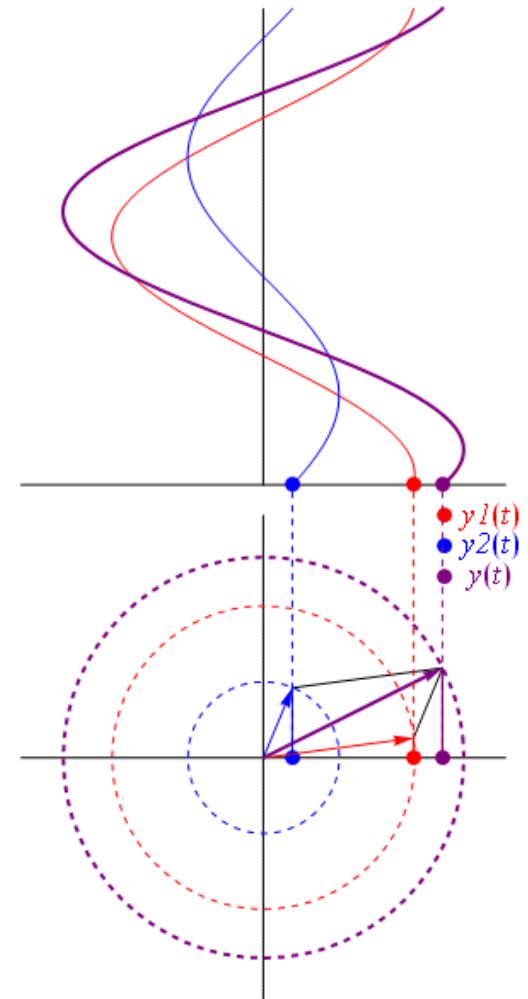


# Phasors

- But this still doesn't seem too useful...
- What about if the phasors rotate at different angular velocities?

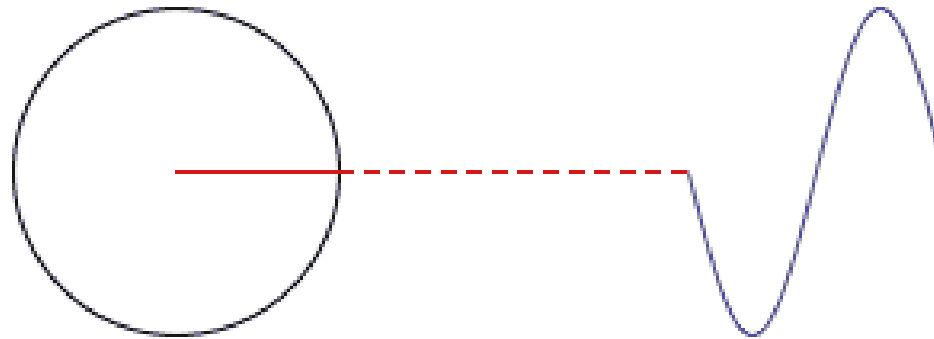

# Square Wave

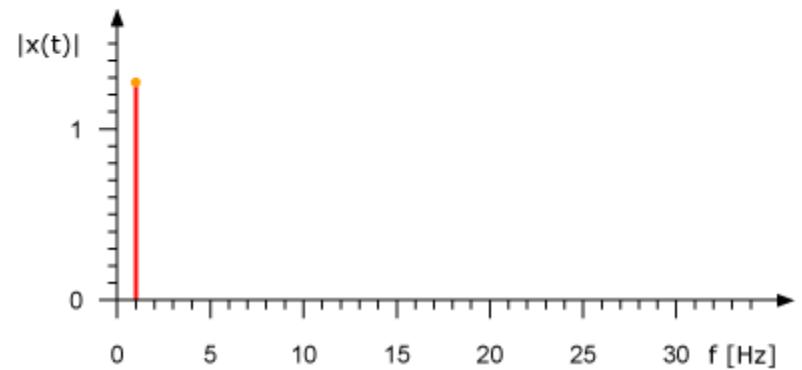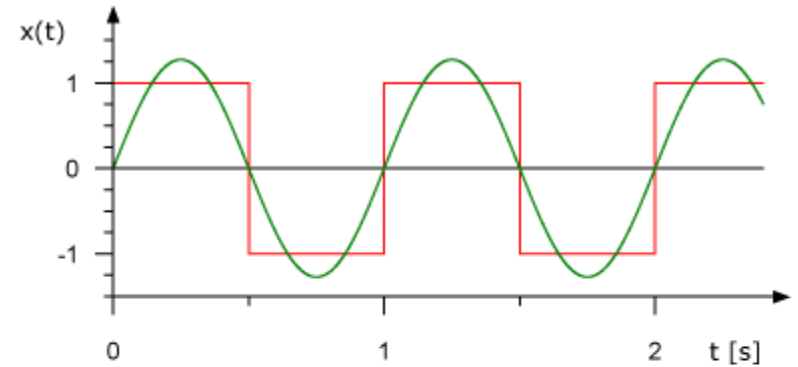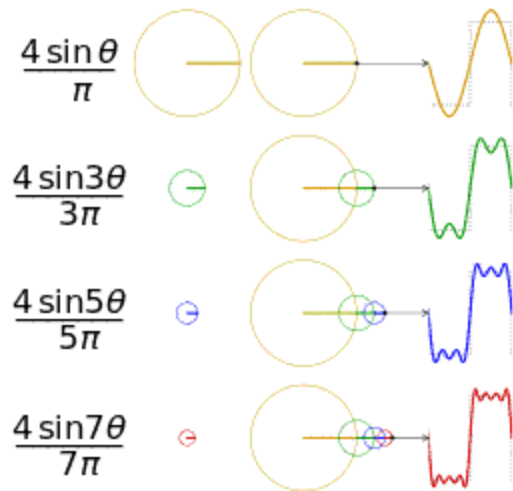

# Saw-tooth Wave

$$\frac{2\sin\theta}{-\pi}$$



$$\frac{2\sin 2\theta}{2\pi}$$



$$\frac{2\sin 3\theta}{-3\pi}$$



$$\frac{2\sin 4\theta}{4\pi}$$



# Clicker Question

- Two waves with the same frequency (and hence, wavelength) are completely out of phase with each other. Which of the phaser diagrams below represent the sum of the two waves?





- <https://youtu.be/QVuU2YCwHjw>